

# SPS 50 HC



**DESCRIZIONE**  
**Posizionatore a tavola rotante, portata massima 50 kg, inclinazione manuale e foro passante diam. 50 mm.**




**DESCRIPTION**  
 Turntable type positioner, max load 50 kg, manual tilt and 50 mm diam. hollow center

**ОПИСАНИЕ**  
 Сварочные вращатели Грузоподъемность макс. 50 кг, ручная настройка угла наклона, отверстие по центру планшайбы диаметром 50 мм

**DESCRIPTION**  
 Positionneur à table rotative, portée max 50 kg, inclinaison manuelle et trou centrale diam. 50 mm

**BESCHREIBUNG**  
 Drehtisch-Positionervorrichtung Tragfähigkeit 50 kg, Kippung manuell und Hohlwelle mit 50 mm Durchmesser

**DESCRIPCIÓN**  
 Posicionador de mesa giratoria, capacidad máxima 50 kg, inclinación manual y agujero de paso diám. 50 mm

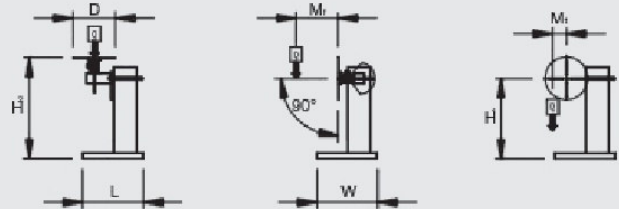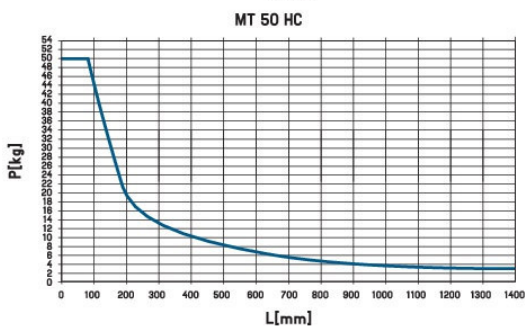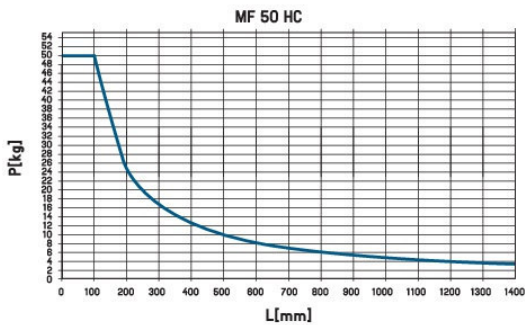

Tipo motore	Q Kg	MT danm	MF danm	D mm	H1 mm	H2 mm	L mm	W mm	rpm	volt	volt	volt	LxWxH2 mm	Kg
DC	50	4	5	300	275	435	330	330	1-10	1x220	24	220	400x370x370	30

ACCESSORI / ACCESSORIES / Дополнительные принадлежности / OPTIONS / ZUBEHÖR / ACCESORIOS

SPS/SCH - SPS/VL

# SPS 50S HC

## DESCRIZIONE

Posizionatore a tavola rotante, portata massima 50 kg, inclinazione manuale e foro passante diam. 50 mm. Sormonto.

## DESCRIPTION

Turntable type positioner, max load 50 kg, manual tilt and 50 mm diam. hollow center. Overwelding.

## ОПИСАНИЕ

Сварочные вращатели грузоподъемность макс. 50 кг, ручная настройка угла наклона, отверстие по центру планшайбы диаметром 50 мм. Функция перекрытия швов

## DESCRIPTION


Positionneur à table rotative portée max 50 kg, inclinaison manuelle et trou centrale diam. 50 mm. Recouvrement.

## BESCHREIBUNG


Drehtisch-Positionervorrichtung Tragfähigkeit 50 kg, Kippung manuell und Hohlwelle mit 50 mm Durchmesser. Überlappweißung.

## DESCRIPCIÓN


Posicionadore de mesa giratoria capacidad maxima 50 kg, inclinación manual y agujero de paso diám. 50 mm. Solape.

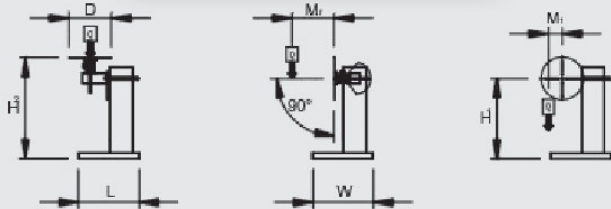

MF 50 HC

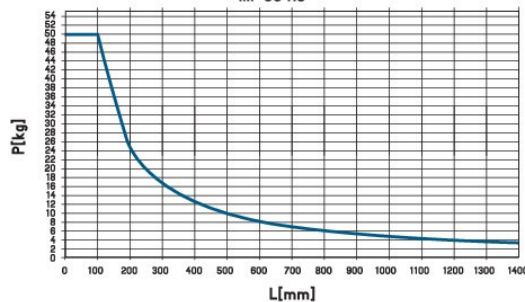

MT 50 HC

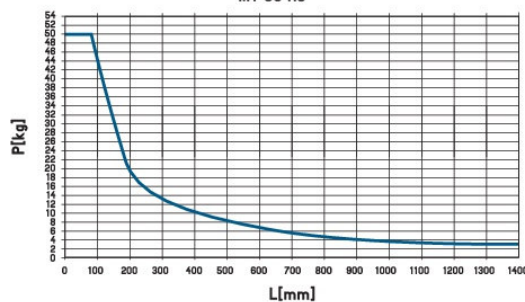

Tipo motore	Q Kg	MT danm	MF danm	D mm	H1 mm	H2 mm	L mm	W mm	rpm	volt	volt	volt	LxWxH2 mm	Kg
DC	50	4	5	300	275	435	330	330	1-10	1x220	24	220	400x370x370	30

ACCESSORI / ACCESSORIES / Дополнительные принадлежности / OPTIONS / ZUBEHÖR / ACCESORIOS

BPT 300AUT - BPT 300 MAN - SMcr50x50 - SPS/SCH - SPS/VL - SPS TT